

PM9400E

Portable Generator

Features

- **One-Touch Electric Start** with auto-choke provides reliable, hassle-free startups.
- **Large Capacity Steel Fuel Tank** provides durability and up to a 13 hour run time at 25% load.
- **Powered by Generac 420cc OHV Engine** provides consistent power for multiple applications.
- **10" Never Flat Wheels** for easy transportation.
- **Hour Meter** tracks run-time and maintenance intervals.
- **Low-Oil Level Shutdown** prevents engine damage.
- **Fuel Gauge** allows users to keep track of gasoline levels.
- **Covered Outlets** provide protection and keep out debris.


Model P0080301 (49 ST / CSA) UPC: 696471077827

Model P0081500 (50 ST) UPC: 696471080384



AC Maximum Output Starting Watts 9400
AC Rated Output Running Watts 7500

49-State/CSA / 50-State Control Panel

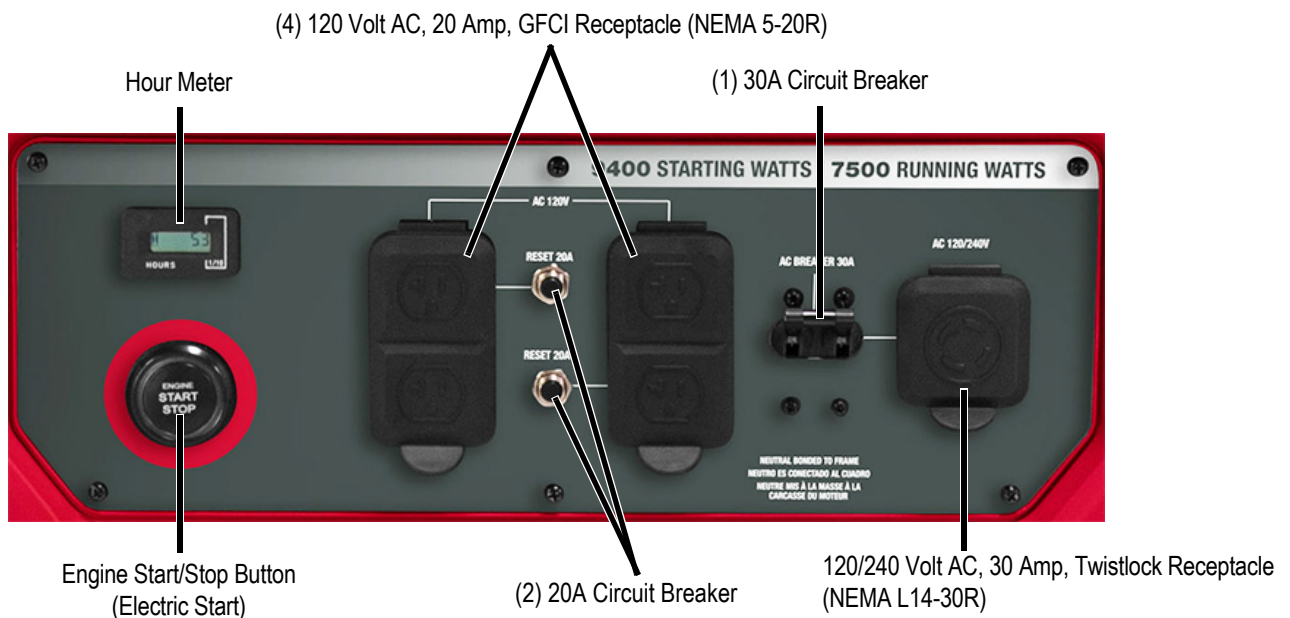

PM9400E

Specifications

| | |
|----------------------------------|---|
| Product Series | PM9400E |
| Model (Configuration) | P0080301 (49 ST/CSA) P0081500 (50 ST) |
| AC Maximum Output Starting Watts | 9400 |
| AC Rated Output Running Watts | 7500 |
| Rated AC Voltage | 120/240 VAC |
| Rated AC Frequency | 60 Hz |
| Rated 120/240 VAC Amperage | 62.5 / 31.3 |
| Engine Displacement | 420cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 |
| Lubrication Method | Splash |
| Choke Location | Auto-Choke (manual lever on engine for recoil start mode) |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | One-Touch Electric Start / Recoil |
| Low Oil Shutdown | Low Level |
| Neutral Bonded to Ground | Yes |

| | |
|---------------------------------------|------------------|
| Start Switch Type | Push Button |
| Start Switch Location | On Control Panel |
| Fuel Tank Capacity Gal (L) | 8 (30.3) |
| Run Time at 25% of Rated Load (Hours) | 13 |
| Run Time at 50% of Rated Load (Hours) | 10 |
| Warranty- Residential | 3 Year Ltd |
| Warranty- Commercial | 90 Day |

Dimensions and Weights

| | |
|--------------------------|-------------|
| Extended Length in (mm) | 48.7 (1238) |
| Length in (mm) | 31 (789) |
| Width in (mm) | 27 (685) |
| Height in (mm) | 26.4 (670) |
| Carton Length in (mm) | 32.7 (830) |
| Carton Width in (mm) | 23 (585) |
| Carton Height in (mm) | 24.2 (615) |
| Unit Weight lbs (kg) | 188 (85.3) |
| Shipping Weight lbs (kg) | 204 (92.5) |

